
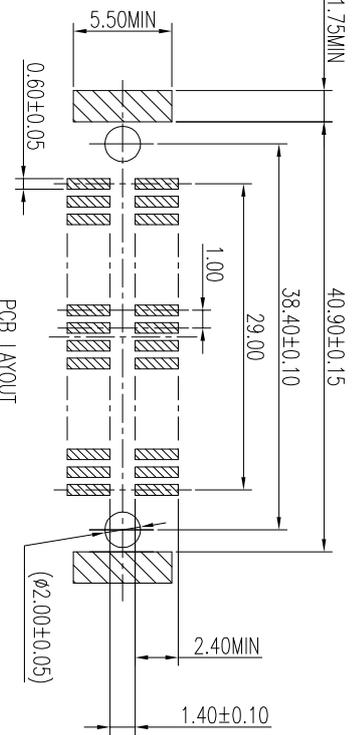
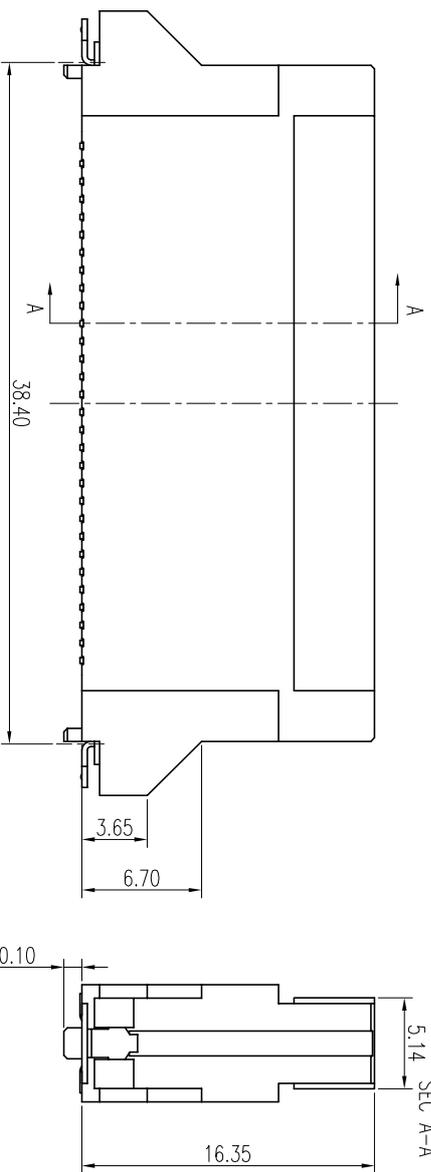


REV	ECN	CONTENT	CHECK	DATE
V0.0		ORIGINAL	ZY	2019.11.27
V0.0		arrange the drawing	XCN	2020.06.05

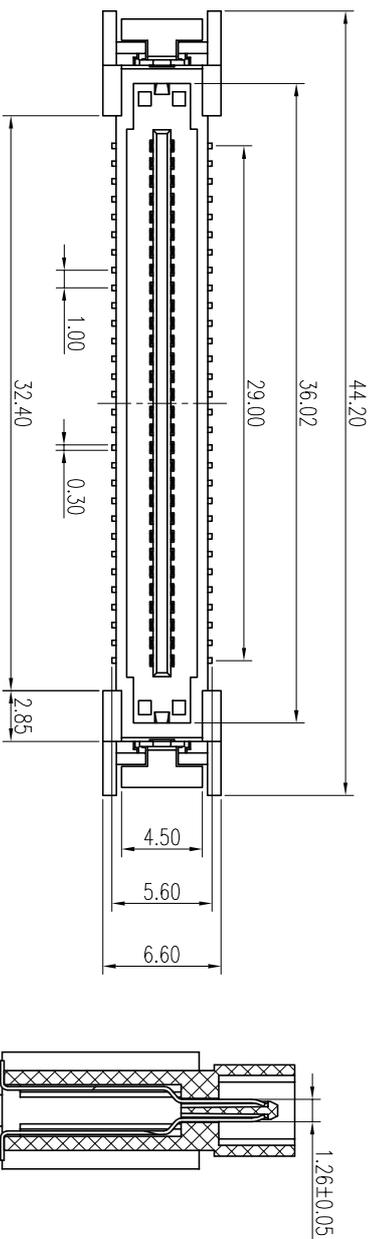

**技术要求:**


1. 材质:  
塑胶: LCP 白色 UL94V-0  
PIN针: 磷青铜 (t=0.20)  
电镀:  
接触区域镀金最小0.25um  
焊接区域镀金最小0.025um;  
其余区域镀镍最小2um;
2. PIN针平面度0.15以内。
3. 符合RoHS要求。
4. 符合RoHS要求。

**焊接说明:**

回流焊: 240°C, 20S max, 峰值温度260°C,  
手工焊接: 30W电烙铁, 320±5°C, 3S max

**编码规则**

9KF002 P - 60P - XX - XXXXX

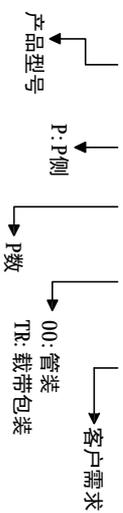

General tolerance in mm		radii and chamfers		shorter angle side		=		//	
0.5	over	30	over	0.5	over	to	over	0	over
3	to	6	to	3	to	to	to	to	to
6	to	120	to	6	to	all	to	100	to
30	to	400	to	3	to	100	to	150	to
120	to	1000	to	10	to	50	to	150	to
400	to	3	to	50	to	120	to	0.5	to
1000	to	±0.2	to	±1°	to	±20'	to	0.2	to
±0.15	±0.2	±0.25	±0.3	±0.5	±0.8	±0.2	±0.5	±1.0	±1°

APP.	DATE	NAME	9KF002P-60P-00
CHK.	DATE		
DWG.	DATE	DWGNO.	W22000021
UNITS	MM	SCALE	1:1
		SHEET	1/1
		PROJECTION-METHOD	☉



慈溪市凯峰电子有限公司  
CIXI KAIFENG ELECTRONICS CO., LTD